

The Cata BT is a pneumatic launch system for the rapid deployment of one-way effectors and compatible with diverse all-terrain vehicles for enhanced mobility.

KEY FEATURES



Compatible with all-terrain vehicles for high mobility



Automated rail opening



Maximum takeoff weight: 400 kg



Launch speed: 55 m/s



Deployment and extraction takes under 3 minutes



Operated via a remote-control panel



2 operators




Training duration:

1 week

DEPLOYED LENGTH

TRANSPORTATION MEASURES

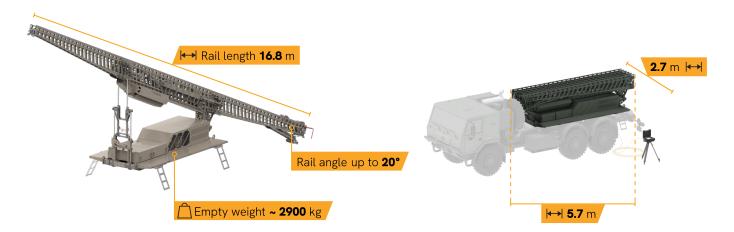



TECHNICAL SPECIFICATIONS

PERFORMANCE

UAV MASS

Up to 400 kg (see graph)

LAUNCH SPEED

≤ 55 m/s (see graph)

OPERATING TEMPERATURE

-20 °C to +50 °C

OPERATIONAL

DEPLOYMENT & EXTRACTION

< 3 mir

LAUNCH RECOVERY ~ 4 min

REMOTE CONTROL

Wired 20 m or Wireless 100 m

COLOR OPTIONS

STANDARD COLORS

RAL 6031-F9 NATO Green


RAL 1019

Desert

OTHER COLORS

Available upon request

CATA BT LAUNCHER ENVELOPE

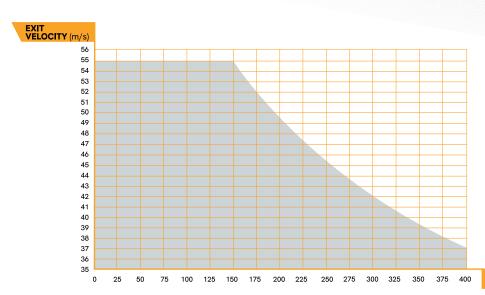

AIRCRAFT MASS (kg)



